VOX

Valvetronix

ToneLab LE

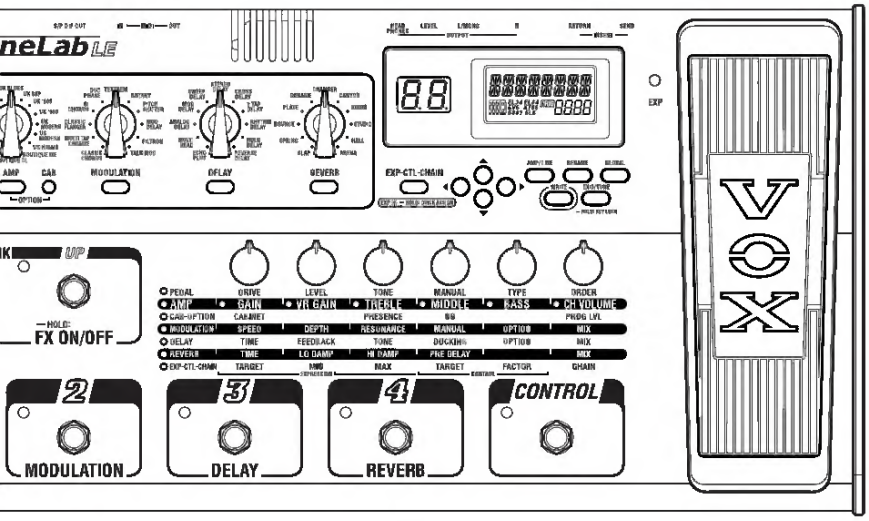

Owner's Manual

Ⓔ①

Downloaded from www.Manualslib.com manuals search engine

If Active Content is disabled in the browser, the following error window appears:

YourCompany, Inc.
Testing software installation failed
Installation of the testing software failed.
Did you see an Information bar like?
Back
Address
https://10.0.20.15:89/index.jsp?action_type=
The previous site might require the following ActiveX cont
If so, click on it and select Install ActiveX Control.
More suggestions
Download the software manually
To download and install the software yourself, do the following:
1. Download the testing software.
2. Run the software, following the step-by-step instructions.
3. Click begin testing to have your computer tested.
For assistance, call the Help Desk at (303) 555-5555 or email support@company.com.
Diagnostics
TRY INSTALLATION AGAIN

Figure 5-7. End-user Agent Installation Failed

TIP: To enable active content, see "Active Content" on page B-3.

If this is the first time the end-user has selected **NAC Agent test**, a security acceptance window appears. In order to proceed with the test, the user must select to **Install** the digital signature.

Table of Contents

Table of Contents 1
Usage Notice 3
Precautions 3
Introduction 5
Product Features 5
Package Overview 6
Product Overview 7
Main Unit 7
Control Panel 8
Connection Ports 9
Remote Control with Laser Pointer 10
Installation 11
Connecting the Projector 11
Powering On/Off the Projector 13
Powering On the Projector 13
Powering Off the projector 14
Warning Indicator 14
Adjusting the Projected Image 15
Adjusting the Projector Image Height 15
Adjusting the Projector Zoom / Focus 16
Adjusting Projected Image Size 16
User Controls 17
Control Panel & Remote Control 17
On-Screen Display Menus 21
How to operate 21
Color (Computer/Video Mode) 22
Image (Computer/Video Mode) 24
Management (Computer/Video Mode) 26
Audio (Computer/Video Mode) 32
Timer (Computer/Video Mode) 33
Language(Computer/Video Mode) 34
Wireless Projection 35
Introduction 35
System Requirements 35
I/O Interface 35
Setting up your WPG 36

Downloaded from www.Manualslib.com manuals search engine

Warranty and Customer Service

ADTRAN will repair and return this product within the warranty period if it does not meet its published specifications or fails while in service. It is the responsibility of the entity (ADTRAN Certified Dealer or Service Provider) that sold you your ADTRAN equipment to diagnose and initiate the product return to ADTRAN.

Product Registration

Registering your product during installation helps ensure complete customer satisfaction. Please take time to register your product with a valid Company name and e-mail address when you perform the installation.

Product Support Information

Post-Sale Support

The entity (ADTRAN Certified Dealer or Service Provider) that sold you your ADTRAN equipment should serve as the first point of contact for support. If additional support is needed, the ADTRAN Support website provides a variety of support services such as a searchable knowledge base, updated firmware releases, latest product documentation, and troubleshooting tools. All of this, and more, is available at:

http://support.adtran.com

Installation and Maintenance Support

The entity (ADTRAN Certified Dealer or Service Provider) that sold you your ADTRAN equipment should serve as the first point of contact for support. However, if you have purchased ADTRAN Custom Extended Services (ACES), you are eligible to access the ACES Help Desk. The ACES program offers multiple types and levels of installation and maintenance services which allow you to choose the kind of assistance you need. This support is available at:

http://support.adtran.com

For questions, call the ACES Help Desk.

ACES Help Desk (888) 874-ACES (2237)

Copyright © 2006 ADTRAN, Inc.

Downloaded from www.Manualslib.com manuals search engine

3 Routine Cleaning 26
3.1 Vacuum Excess Core 28
3.2 Clean The Debris Separator 26
3.3 Clean The Parking Caps 28
3.4 Clean The Fast Axis Rails and Carriage 31
3.5 Clean The Service Station 32
3.5.1 Example - Dirty Service Station 32
3.5.2 Example - Clean Service Station 33
3.5.3 Cleaning Procedure 33
4 Post-Processing 36
4.1 Post-Processing Using Water Cure 36
4.2 Post-Processing With ColorBond™ 36
4.3 Post-Processing With StrengthMax™ 36
5 Additional Operations 38
5.1 The Printer Status Dialog 38
5.1.1 Ready to Print 38
5.1.2 Not Ready to Print 39
5.2 Change Print Head(s) 40
5.3 Add Binder 43
5.4 Adding Core to the Feeder 43
5.5 Add Cleaning Solution 45
5.6 Replace the Waste Tray 45
5.7 Position Build Piston (Build Bed) 46
5.8 Cover 46
6 Printer Maintenance 47
6.1 Fast Axis Bearing Lubrication 47
6.2 Piston Screw Lubrication - ProJet 660Pro 48
6.3 Piston Screw Lubrication - ProJet 860Pro 50
6.4 Slow Axis Bearing Lubrication 53
6.5 Clean The Alignment Sensor Window 54
6.6 Clean The Fast Axis Pulleys 55
6.7 Clean The Slow Axis Rails and Pulleys 56
6.8 Clean The Spreader Roller 60
6.9 Printer Storage Preparation 60
7 Troubleshooting the ProJet x60Pro 61
7.1 Try This First 62
7.2 Problems Powering Up 63
7.3 Print Head Errors/ Weak Parts 64
7.3.1 Try This First 64
7.4 Alignment Errors 66
7.5 Motion Errors - Fast Axis 67
7.6 Motion Errors - Slow Axis 69
7.7 Network Errors - Cannot Connect to Printer 71
7.8 Network Errors - Packet Timeout 72
7.9 Part Quality Issues - General 72

All Rights Reserved

Downloaded from www.Manualslib.com manuals search engine

Power mode and run-time

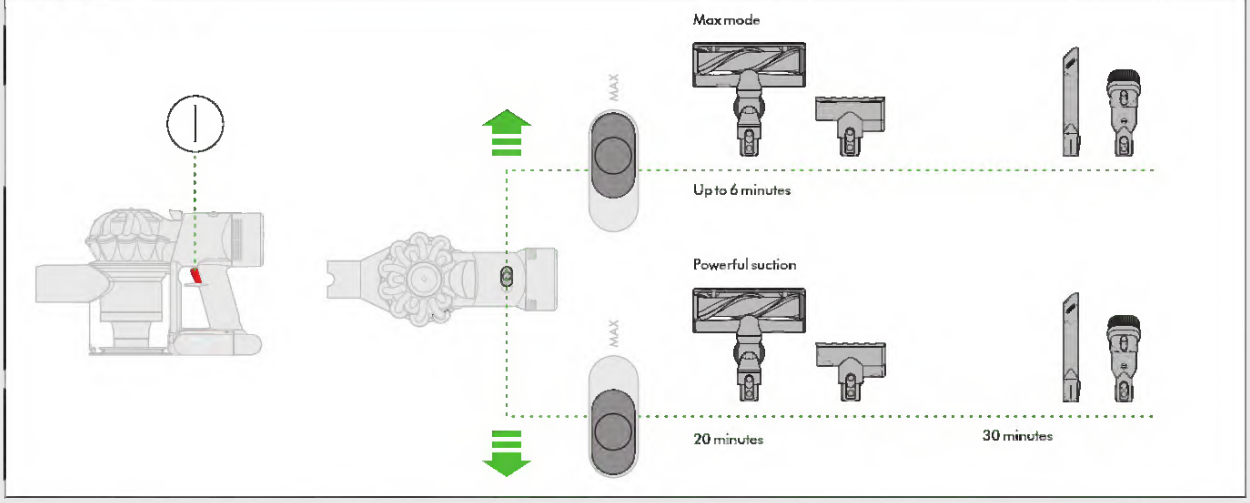

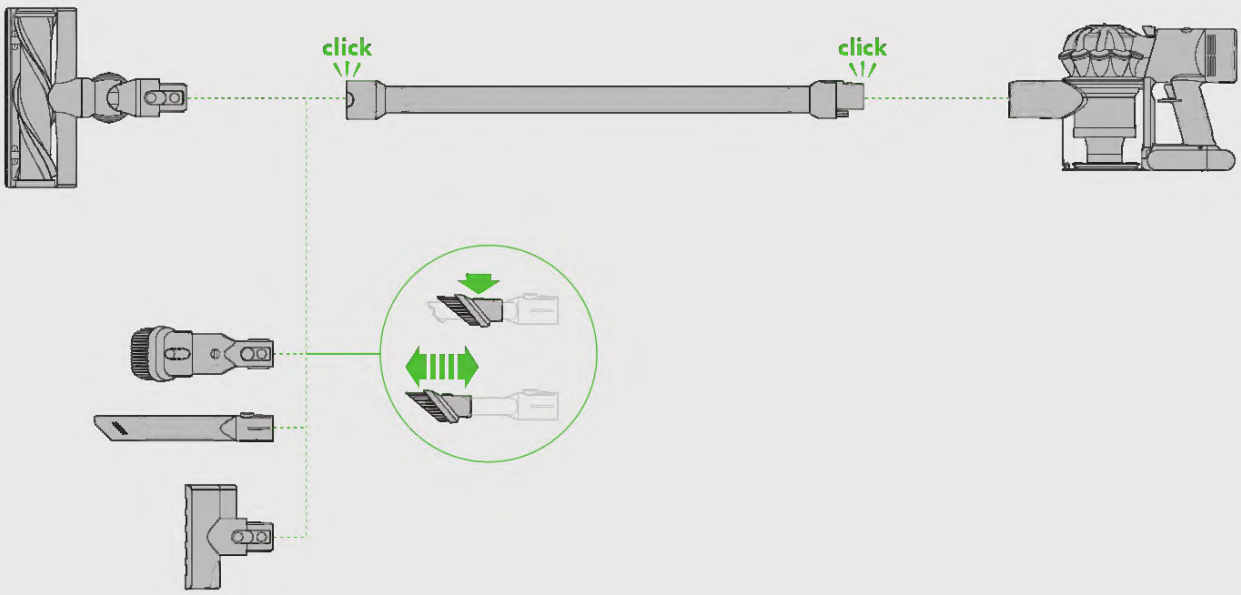

Emptying the clear bin

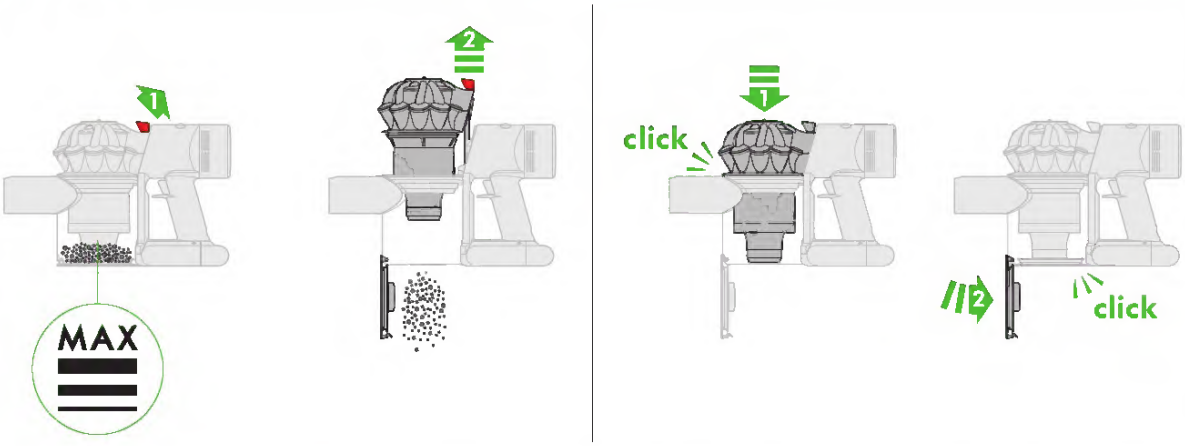

Downloaded from www.Manualslib.com manuals search engine

Load

WARNING

Do not wash or dry items soiled with vegetable or cooking oils. Some oils may remain after washing and may cause the fabric to catch on fire by itself.

W527

- Do not overload your dryer. Bulk, not weight, determines the load size. If the dryer is overloaded, it could cause discoloration or permanent heat damage to the load.
- There should be space in the dryer for the clothes to tumble freely and help to reduce wrinkles.
- Large and small pieces together make up loads which will tumble well. Permanent press loads should be smaller to provide room for tumbling. Proper tumbling allows for fewer wrinkles.
- A load can be too small. Just a few small pieces will not tumble properly. They will take longer to dry and they may be wrinkled. For small loads, add a couple of large towels or non lint shedding items to aid in tumbling.
- The following illustrations show the ideal load sizes for fabrics. The average load will fill the cylinder one third to half full when wet.

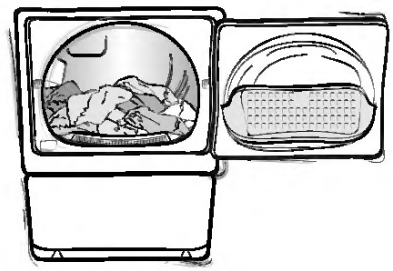

DRY2031N

Cylinder with wet linens and cottons

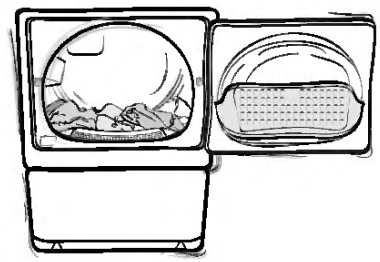

DRY2032N

Cylinder with wet permanent press items

Compaq Technician Notes

Weight in kg
Weight in lb

Any product or assembly marked with these symbols indicates that the component exceeds the recommended weight for one individual to handle safely.

WARNING: To reduce the risk of personal injury or damage to the equipment, observe local occupational health and safety requirements and guidelines for manual material handling.

WARNING: Only authorized technicians trained by Compaq should attempt to repair this equipment. All troubleshooting and repair procedures are detailed to allow only subassembly/module-level repair. Any indications of component replacement or printed wiring board modifications may void any warranty.

WARNING: To reduce the risk of personal injury from electric shock and hazardous energy levels, do not exceed the level of repair specified in these procedures. Because of the complexity of the individual boards and subassemblies, do not attempt to make repairs at the component level or to make modifications to any printed wiring board. Improper repairs could create conditions that are hazardous.

WARNING: To reduce the risk of electric shock or damage to the equipment:

- If the system has multiple power supplies, disconnect power from the system by unplugging all power cords from the power supplies.
- Do not disable the power cord grounding plug. The grounding plug is an important safety feature. The computer is designed to be electrically grounded. Plug the AC power cord into a properly grounded AC outlet only.
- Plug the power cord into a grounded (earthed) electrical outlet that is easily accessible at all times.

CAUTION: To properly ventilate your system, you must provide at least 12 inches (30.5 cm) of clearance at the front and back of the computer.

CAUTION: The computer is designed to be electrically grounded. To ensure proper operation, plug the AC power cord into a properly grounded AC outlet only.

Where to Go for Additional Help

In addition to this guide, the following information sources are available:

- User Documentation
- *Compaq Service Quick Reference Guide*
- Service Training Guides
- Compaq Service Advisories and Bulletins
- Compaq QuickFind
- Compaq Insight Manager
- Compaq Download Facility: Call 1-281-518-1418

Downloaded from www.Manualslib.com manuals search engine

4 Specification

Table 1:

Model			MWVT09S/ MRVT09AS	MWHVT09S/ MRHVT09AS
Indoor			MWVT09S	MWHVT09S
Outdoor			MRVT09S	MRHVT09S
Power supply		Ph-V-Hz	1Ph, 220-230V~, 60Hz	1Ph, 220-230V~, 60Hz
Cooling	Capacity	8tu/h	9000(3300~11200)	9000(3300~11200)
	Input	W	850(240~1200)	830(240~1200)
	Rated current	A	4.8(1.2~5.3)	4.1(1.2~5.3)
	EER	W/W	3.2	3.2
Heating	Capacity	8tu/h	----	10000(4000~13000)
	Input	W	----	820(240~1250)
	Rated current	A	----	4.1(1.2~5.8)
	COP	W/W	----	3.6
Moisture Removal		L/h	1.0	1.0
Max. input consumption		W	1750	1750
Max. current		A	8.0	8.0
Compressor	Model		DA89X1C-23FZ	DA108X1C-20FZ3
	Type		ROTARY	ROTARY
	8rand		TOSHI8A	TOSHI8A
	Capacity	8tu/h	9040	10918
	Input	W	680	855
	Rated current(RLA)	A	4.7	5.3
	Locked rotor Amp(LRA)	A	10	10
	Thermal protector		CS-74	INT01L-4639 / CS-74
	Thermal protector position		internal	EXTERNAL
	Capacitor	uF	35	35
	Refrigerant oil/oil charge	ml	ESTER OIL VG74 370 ml	ESTER OIL VG74 / 480
Indoor fan motor	Model		RPG208	RPG208
	8rand		Welling	Welling
	Input	W	43	43
	Capacitor	uF	1.5	1.5
	Speed(Hi/Mi/Lo)	r/min	1100/1000/850	1100/1000/850
Indoor coil	Number of rows		2/1	2/1
	Tube pitch(a)x row pitch(b)	mm	21x13.37	21x13.37
	Fin spacing	mm	1.3	1.3
	Fin type (code)		Hydrophilic aluminium	Hydrophilic aluminium
	Tube outside dia. and type	mm	φ7 INNEGROOVE TU8E	φ7 INNEGROOVE TU8E
	Coil length x height x width	mm	621X(189+126)X(26.74+13.37)	621X(189+126)X(26.74+13.37)
	Number of circuits		2	2
Indoor air flow (Hi/Mi/Lo)		m3/h	540/490/420	540/490/420
Indoor noise level (Hi/Mi/Lo)		d8(A)	38/35/32	38/35/32

Downloaded from www.Manualslib.com manuals search engine

AUTOMATIC TUNING OF CHANNELS

Automatic tuning of channels allows you to store each programme automatically.

Step	Press button		Result on screen
1	MENU	Press twice to enter MEMORY main menu.	
2	C / C	Press button repeatedly until AUTO SEARCH is selected.	
3	V	Start automatic tuning of channels.	
4	V	Press button to stop tuning. **Note:** when the tuning is completed, the menu will quit automatically.	

MANUAL TUNING OF CHANNELS

Manual tuning allows you to select your preferred channel number for every available programme.

Step	Press button		Result on screen
1	MENU	Press twice to enter MEMORY main menu.	
2	C / C	Press button repeatedly until Manual Store is selected.	

ËµÄ÷Êé.p65 10 02-7-2, 17:47

Downloaded from www.Manualslib.com manuals search engine

RECIPES

Program Setting: 1 (White)

WHITE BREAD, 3-lb. loaf

2 cups water (80 to 90°F)
4 tbsp. butter or margarine, cut into pieces
2¼ tsp. salt
4 tbsp. dry milk powder
1 tbsp. sugar
5½ cups bread flour
1¼ tsp. bread machine yeast

1. Measure ingredients into bread pan in the order listed.
2. Insert bread pan securely into unit; close lid. Plug unit into wall outlet.
3. Select White setting and appropriate loaf size (3-lb.) and desired color.
4. Press Start/Stop (I/O) button.
5. The complete signal will sound when bread is done.
6. Using pot holders remove bread top from the unit and carefully remove bread and turn right side up. (Kneading paddles may remain in bread. Remove paddles when bread has cooled.)
7. Allow bread to cool on wire rack until ready to serve (at least 20 minutes).

Program Setting: 1 (White)

GOLDEN POTATD BREAD, 2-lb. loaf

¾ cup potato cooking water (80 to 90°F)*
½ cup warm mashed potatoes
2 tbsp. unsalted butter or margarine, cut into pieces
3 tbsp. dry skim milk powder
2 tbsp. potato starch
1 tsp. granulated sugar
1½ tsp. salt
1 large egg, at room temperature
4 cups bread flour
2¼ tsp. bread machine yeast

1. Measure ingredients into bread pan in the order listed.
2. Insert bread pan securely into unit; close lid. Plug unit into wall outlet.
3. Select Basic setting and appropriate loaf size (2 lb.) and desired color.
4. Press Start/Stop (I/O) button.
5. The complete signal will sound when bread is done.
6. Using pot holders, remove bread pan from the unit and carefully remove bread and turn right side up. (Kneading paddles may remain in bread. Remove paddles when bread has cooled.)
7. Allow bread to cool on wire rack until ready to serve (at least 20 minutes).

*Place peeled potatoes in saucepan of cold water. Bring to boil; reduce heat and cook until fork tender. Drain, reserving liquid. Mash potatoes without any additions of salt, butter or milk. Cool water from 80 to 90°F. and allow mashed potatoes to stand covered at room temperature for use.

Downloaded from www.Manualslib.com manuals search engine

Rear Panel

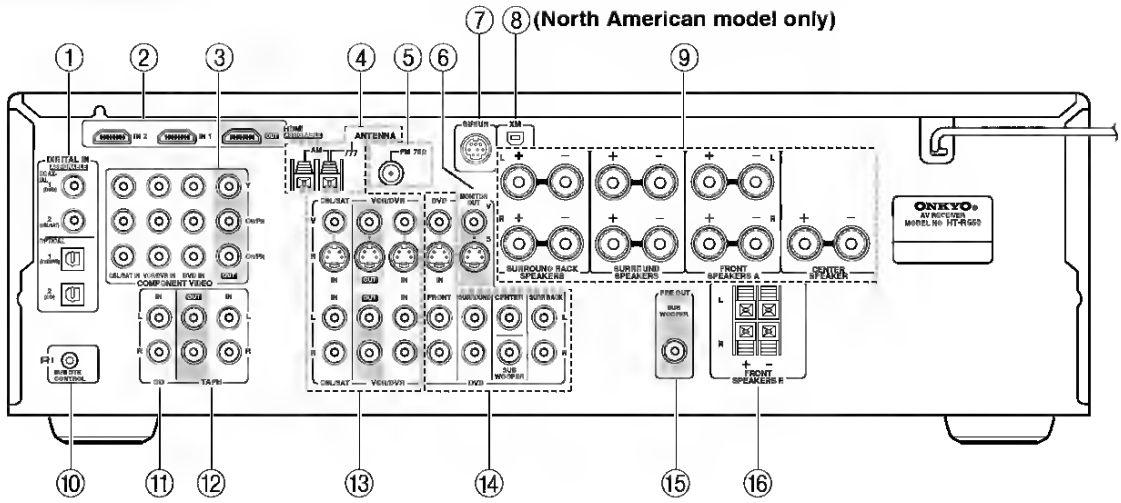

① **DIGITAL IN OPTICAL 1, 2 and COAXIAL 1, 2**
These optical and coaxial digital audio inputs are for connecting components with optical or coaxial digital audio outputs, such as CD and DVD players.

② **HDMI IN 1, 2, and OUT**
These jacks are for connecting HDMI-compatible components. Audio and video signals received by the HDMI IN jacks pass through to the HDMI OUT jack.

③ **COMPONENT VIDEO**
A DVD player, TV, or other component that supports component video can be connected here.

④ **AM ANTENNA**
These push terminals are for connecting an AM antenna.

⑤ **FM ANTENNA**
This jack is for connecting an FM antenna.

⑥ **MONITOR OUT**
The S-Video or composite video output should be connected to a video input on your TV or projector.

⑦ **SIRIUS antenna (North American models only)**
This jack is for connecting a SIRIUS Satellite Radio antenna (see the separate SIRIUS instructions).

⑧ **XM antenna (North American models only)**
This jack is for connecting an XM Passport System, sold separately (see the separate XM instructions).

⑨ **FRONT SPEAKERS A, SURROUND SPEAKERS, CENTER SPEAKER, and SURROUND BACK SPEAKERS**
These terminal posts are for connecting speaker set A.

⑩ **RI REMOTE CONTROL**
This RI Remote Interactive jack can be connected to tbe RI jack on another RI-capable Onkyo component. To use RI, you must make an analog audio connection (RCA) between the AV receiver and the other component, even if they are connected digitally.

⑪ **CD IN**
This analog audio input is for connecting a CD player's analog audio output.

⑫ **TAPE IN/OUT**
This analog audio input and output are for connecting a recorder witb an analog audio input and output, such as a cassette deck, MD recorder, etc.

⑬ **VCR/DVR IN/OUT and CBL/SAT IN**
The VCR/DVR inputs and outputs can be used to connect a VCR or DVR (digital video recorder).

The CBL/SAT inputs can be used to connect a cable/satellite receiver, set-top box, etc.

⑭ **DVD IN**
These jacks can be used to connect a DVD player with an analog multichannel audio output for SACD and DVD-Audio playback.

⑮ **SUBWOOFER PRE OUT**
A powered subwoofer can be connected here.

⑯ **FRONT SPEAKERS B**
These push terminals are for connecting speaker set B.

See pages 19–35 for hookup information.

Downloaded from www.Manualslib.com manuals search engine

Re-activate bypassed zones

To fully arm the system when it has been armed in Stay mode:

1. Press (*)(1) at any keypad. The interior zones are now armed.

NOTE: *When you have re-activated the interior zones, you will not be able to enter areas protected by motion detectors, or open doors and windows. To access these areas, you must enter your [access code] and disarm the system.*

Stay Button

You may also be able to quickly Stay arm your system using the "Stay" function button on your keypad. *If your installer has programmed this button,* press and hold it for two seconds to arm in Stay mode.

Quick Arm

Your installer will tell you if the Quick Arm method has been enabled on your system. Using this method, you can quickly arm your system without having to enter an access code.

To quick arm:

1. Check that the system is ready to be armed (Ready light is ON)
2. Press (*)(0).
   - The keypad sounds fast beeps.
   - The Armed light turns ON.
   - LCD5500Z keypads display "Exit Delay in Progress".
   - The exit delay begins and the keypad beeps once every second until the end of the exit delay.
3. Exit the premises through the entry/exit door. The system will be armed in Away mode. If you do not exit the premises, the system will be armed in Stay mode. This mode also applies to individual partitions.

NOTE: *Pressing (*)(0) will only arm the system. To disarm, you must enter a valid [access code].* See *"Disarming Your Security System" on page 11.*

NOTE: *For Away, Stay or Quick Arming, you may restart the exit delay routine if an Entry/Exit zone is opened, restored, then reopened once again. This restart routine can occur one time only. This can be done on separate partitions.*

"No Entry" Arming

If you want to arm the system, and no one else will be entering, you can remove the entry delay from zones that normally have one.

An entry through any zone will then create an instant alarm.

1. Check that your system is ready to be armed (Ready light is ON)
2. Press (*)(9), then your [access code].
   - The Armed light flashes as a reminder that the system is armed and has no entry delay.
   - The keypad sounds fast beeps.
   - LCD5500Z keypads display "Exit Delay in Progress".
3. The system is now armed in Stay mode.

Downloaded from www.Manualslib.com manuals search engine

- [Економія енергії]Застосовуються налаштування зображення із низьким рівнем споживання електроенергії.

3 Натисніть кнопку OK, щоб підтвердити вибір.
↳ Буде застосовано вибрані налаштування режиму "розумного зображення".

Встановлення налаштувань зображення вручну

1 Натисніть кнопку ⌂ MENU.

2 Натисніть кнопку OK, щоб вибрати [Зображення]
↳ З'явиться меню [Зображення].

3 За допомогою кнопок ▲▼◀▶ виберіть одне із таких налаштувань.

- [Інтел. зображення]Надається доступ до попередньо встановлених налаштувань режиму "розумного зображення".
- [Контрастність] Дозволяє налаштувати інтенсивність яскравих областей, не змінюючи темних областей.
- [Яскравість] Дозволяє налаштувати інтенсивність і деталі темних областей.
- [Колір] Дозволяє налаштувати насиченість кольору.
- [Тон]Компенсує варіації кольору під час передачі сигналу NTSC.
- [Чіткість] Дозволяє налаштувати рівень чіткості деталей зображення.
- [Зменшення шумів] Фільтрує та зменшує шуми зображення.
- [Відтінок]Дозволяє налаштувати баланс кольору для зображення.
- [Налашт. відтінок]Можна виконати спеціальне налаштування відтінків.
- [Dig.CrystalClear]Цифрове налаштування якості зображення на оптимальну контрастність, колір та чіткість.
- [Динам. контрас.]Автоматично покращує контрастність зображення. Рекомендовано налаштування [Середня]
- [Динам. підсвіч.]Дозволяє налаштувати яскравість підсвітки телевізора відповідно до умов освітлення.
- [Змен. дефек. MPEG]Згладжує перехід кольорів у цифровому зображенні. Цю функцію можна увімкнути або вимкнути.
- [Покращ. кольору]Робить кольори насиченішими та покращує роздільну здатність яскравих деталей. Цю функцію можна увімкнути або вимкнути.
- [Режим ПК]Дозволяє налаштувати зображення, коли комп'ютер під'єднано до телевізора через роз'єми HDMI/DVI/VGA.
- [Формат зобр.]Дозволяє змінити формат зображення.
- [Гориз. зміщення]Встановлює зображення горизонтально для PC-VGA або YPbPr (EXT2 або EXT3).
- [Верт. зміщення]Встановлює зображення вертикально для PC-VGA або YPbPr (EXT2 чи EXT3).

Зміна формату зображення

1 Натисніть кнопку FORMAT.
↳ Відобразиться панель вибору формату зображення.

2 За допомогою кнопок ▲▼ виберіть формат зображення.
↳ Вибраний формат зображення активовано.

3 Натисніть кнопку OK, щоб підтвердити вибір.

Downloaded from www.Manualslib.com manuals search engine

Connecting other equipment

Depending on the model, your television is firred with 1 or 2 euroconnector sockets

The EXT1 socket has audio and video inputs/outputs and RGB inputs.

The EXT2 socket (for models with 2 euroconnector sockets) has S-VHS inputs.

Video recorder

If you have a video recorder

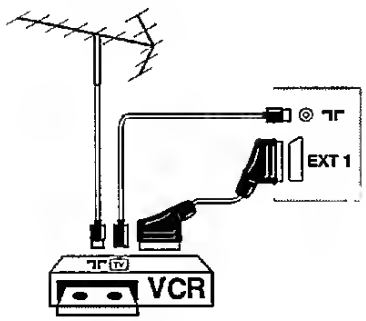

... and a decoder

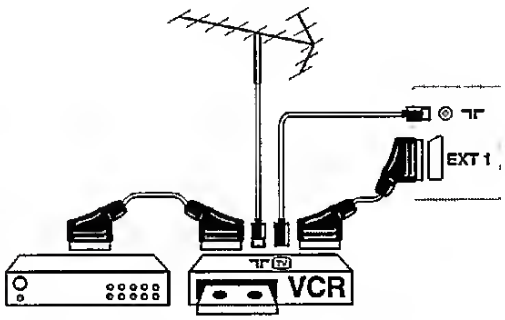

If your video recorder does nor have a euroconnector socket (or if this is already being used by another piece of equipment), the only possible connection is via the aerial socker. Your video recorder is then considered a TV channel by your TV set. You must tune into your video recorder's test signal and assign it the channel number 0. Refer to manual srore p. 5.

To reproduce the video recorder picture, press the ⓪ key (on some video recorders, the "TV/VIDEO" or "AV" key must be pressed).

Refer to the operating instructions of your video recorder for further information on the test signal (the video recorder must be fitted with an HF modulator).

Other equipment

(camcorder, decoder, CDV/CDI, games, satellite receiver, etc.)

For models with 2 euroconnecror sockets, firsr connect to EXT2 equipment producing S-VHS signals (video recorder / S-VHS or Hi-8 camcorder).

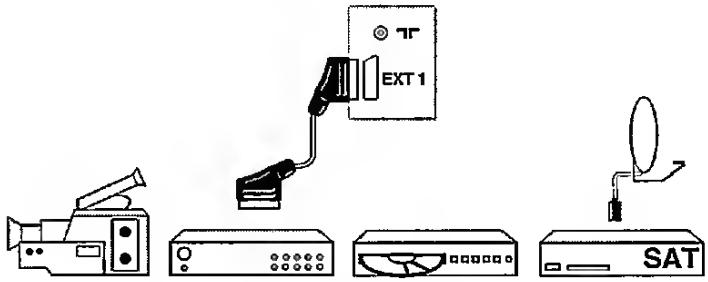

To reproduce the picture of the equipment connected

- Press the ⓔ key to select EXT1 (and EXT2 or EXT2 Y/C: for models with 2 euroconnecror sockets).

Most equipment (decoder, video recorder, etc.) carries out the switchover itself.

Downloaded from www.Manualslib.com manuals search engine

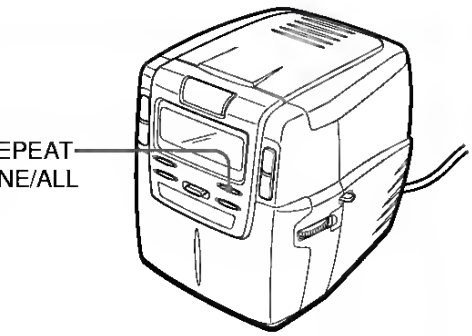

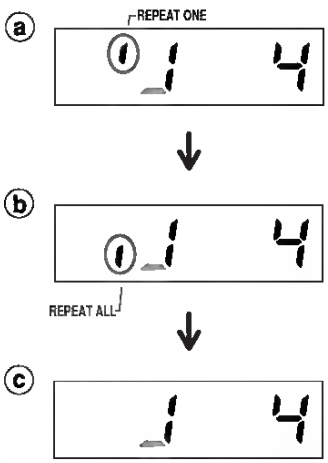

CD PLAYING

English

Repeat play → Ⓑ

Press REPEAT ONE/ALL repeatedly to select repeat play as follows.

ⓐ one track repeat play

↓

ⓑ all track repeat play

↓

ⓒ no repeat play (normal play)

Downloaded from www.Manualslib.com manuals search engine

Bottom view

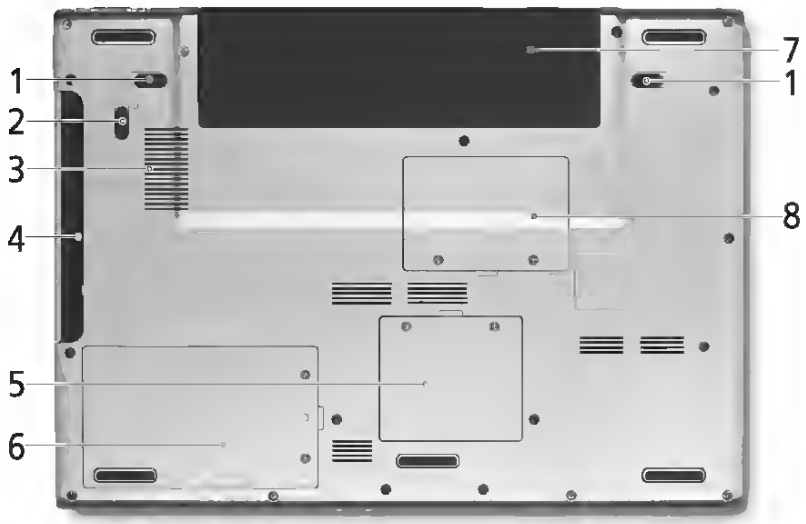

#	Item	Description
1	Battery lock latches	Lock the battery in place.
2	AcerMedia bay release latch	Unlatches the AcerMedia drive for removal of drive (optional).
3	Cooling fan	Helps keep the computer cool. **Note**: Do not cover or obstruct the opening of the fan.
4	AcerMedia bay	Houses an AcerMedia drive module.
5	Wireless LAN bay	Houses the computer's wireless LAN.
6	Hard disk bay	Houses the computer's hard disk (secured by a screw).
7	Battery bay	Houses the computer's battery pack.
8	Memory compartment	Houses the computer's main memory.

Downloaded from www.Manualslib.com manuals search engine

Downloaded from www.Manualslib.com manuals search engine

2. Press the arrows on the control pad while the indicator light on the (1) or (3) button is illuminated, to move the mirror up, down, right, or left.
3. Adjust each outside mirror so that a little of the vehicle and the area behind it can be seen.
4. Press either (1) or (3) again to deselect the mirror.

See *Power Mirrors on page 2-14.*

If equipped with power folding mirrors:

1. Press (2) to fold the mirrors out to the driving position.
2. Press (2) again to fold the mirrors in to the folded position.

See *Folding Mirrors on page 2-15.*

The mirrors may also include a memory function that works with the memory seats. See *Memory Seats on page 3-6.*

Interior Mirror

Adjustment

Adjust the mirror for a clear view of the area behind the vehicle.

Manual Dimming Rearview Mirror

If equipped, push the tab forward for daytime use and pull it for nighttime use to avoid glare from the headlamps from behind. See *Manual Rearview Mirror on page 2-18.*

Automatic Dimming Rearview Mirror

If equipped, the mirror will automatically reduce the glare of the headlamps from behind. The dimming feature comes on when the vehicle is started.

See *Automatic Dimming Rearview Mirror on page 2-18.*

Steering Wheel Adjustment



To adjust the steering wheel:

1. Hold the steering wheel and pull the lever.
2. Move the steering wheel up or down.
3. Release the lever to lock the wheel in place.

Downloaded from www.Manualslib.com manuals search engine

The DOLBY PRO LOGIC feature and the center and rear speakers (standard) assure full-scale home theater sound. When playing back laser discs or video software that have been recorded in Dolby Surround, astonishingly realistic sound surrounds the listener to create a new level of audio/visual entertainment.
Independent control of the four sound channels allows the listener to enjoy the same type of sound reproduction experienced in movie theaters. Voices are reproduced in the front and center sound field, while ambient sounds like cars and crowds are reproduced on all sides of the listener for an incredibly lifelike audio/video experience. Please read the following carefully to "tune" the system's output to match the characteristics of your listening space.

Check the following:

- **Before using the DOLBY PRO LOGIC, adjust the proper balance of speaker sound levels.**
- Make sure the supplied speakers are properly connected and positioned. (See page 4 and 5)
- Make sure the TV set and video unit are properly connected. (See page 5)
- Make sure the laser disc, video tape, etc., support DOLBY SURROUND.

ADJUSTING SPEAKER LEVEL BALANCE

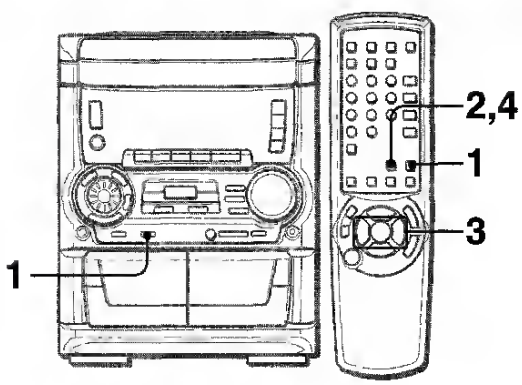

The unit is equipped with a built-in test signal generator called a noise sequencer for easy balance adjustment of all 4 channels. The sequencer outputs a noise signal that "travels" from channel to channel, enabling the simple adjustment of sound level to achieve, at the listening position, the same apparent loudness from each channel.

Use the remote control.

1 **Press DOLBY PRO LOGIC to select "NORMAL".**
"NORMAL" is displayed.
If "PHANTOM" or "3 STEREO" is displayed, press **DOLBY PRO LOGIC** repeatedly until "NORMAL" is selected.

2 **Press MANUAL SELECT and hold it down for about 4 seconds until "L" flashes.**

A noise signal is sent to each channel in turn in the following sequence.

→ **L:** Left speaker → **CEN:** Center speaker → **R:** Right speaker → **SUR:** Surround speakers →

3 **Adjust the sound level of the center and the surround speakers.**
While "CEN" or "SUR" is displayed, press ◄◄ **DOWN** or ►► **UP** on the remote control to adjust the volume of the center or each surround speaker to match the level of the front speakers.

To adjust the balance between the left and right front speakers, see page 10. At this time, the DOLBY PRO LOGIC mode should be canceled by pressing **DOLBY PRO LOGIC** until the "PRO-OFF" is displayed.

4 **Press MANUAL SELECT again to stop the noise signal.**

NOTE

When the sequencer outputs a noise signal, a clicking sound might be heard from the speakers due to the characteristics of the circuit. This is not malfunction.

About the channels

The left and right front speakers create the stereo effect.
The center speaker helps achieve precise sound positioning over a broad sound field.
The rear-mounted surround speakers enhance the "depth" of the sound field.

To change the delay time

The surround speakers reproduce sounds a split second after the front speakers. The delay is initially set to 20 ms (milliseconds).
To change this standard delay time, press **MANUAL SELECT** on the remote control repeatedly until "TIME" is displayed. Then, press ◄◄ **DOWN** or ►► **UP**. Each time one of the buttons is pressed, the delay time changes as shown below.

15 mS ↔ 20 mS ↔ 30 mS

Downloaded from www.Manuatstib.com manuals search engine

Workgroup: Enter the name of your Microsoft Network.

Click **Next** to proceed.

Downloaded from www.Manualslib.com manuals search engine

English

EN61000-3-3: 1995 A1: 2001/ AS/NZS 61000.3.3: 1998	Limits for voltage fluctuations and flicker in low-voltage supply systems	Pass

Conforms to the Low Voltage Directive 73/23/EEC as attested by conformity with the following harmonized standard:

EN60950: 2000 3rd: Safety of Information Technology Equipment Including Electrical Business Equipment.

This equipment has been approved by Council Decision 98/482/EC (CTR21) for pan-European single terminal connection to the Public Switched Telephone Network (PSTN).

We, Acer Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.

Easy Lai

Easy Lai, Director
Acer Incorporated

Downloaded from www.Manualslib.com manuals search engine

Power Management Setup

Power Management Setup
ACPI Suspend Mode [S3 (STR)]
Deep Power Off Mode [Enabled]
Power On by RTC Alarm [Disabled]
Power On by PCIE Devices [Disabled]
Power On by Onboard LAN [Disabled]
Wake Up by PS/2 KB/Mouse [Enabled]
Wake Up by USB KB/Mouse [Enabled]
Restore On AC Power Loss [Last State]
Help Item
Select the ACPI state used for System Suspend.
↑↓↔:Move
Enter:Select
+/-/:Value
ESC:Exit
F1:General Help
F9:Load Default Settings
F10:Save and Exit

Field	Description	Value
ACPI Suspend Mode	Use this item to define how your system suspends. Default value is S3 (STR), the suspend mode is suspend to RAM, i.e., the system shuts down with the exception of a refresh current to the system memory	**S3 (STR)** S1 (POS)
Deep Power Off Mode	Enables or disables compliance to the Energy-using Products Lot 6 Directives (EuP Lot 6).	**Enabled** Disabled
Power On by RTC Alarm	Enables or disables the system to wake up from a power-saving mode when an RTC alarm occurs	Enabled **Disabled**
Power On by PCIE Devices	Enables or disables the system to wake up from a power-saving mode when an event occurs on an installed PCI Express device	Enabled **Disabled**
Power On by PCI Devices	Enables or disables the system to wake up from a power-saving mode when an event occurs on an installed PCI device.	Enabled **Disabled**
Power On by Modem Ring	Enables or disables the system to wake up from a power-saving mode when a modem signal is received. network message	Enabled **Disabled**
Power On by Onboard LAN	Enables or disables the system to wake up from a power-saving mode when the onboard LAN controller received a network message	Enabled **Disabled**
Wake Up by PS/2 KB/ Mouse	Enables or disables the system to wake up from a power-saving mode when a PS/2 keyboard or mouse is used.	**Enabled** Disabled

Downloaded from www.Manualslib.com manuals search engine

1.3.2 Jumper Settings

Table 1-1 Jumper Settings

Jumper	Setting	Function
Password Security JP3	 1-2 2-3*	 Check password Bypass password
BIOS JP4	 1-2* 2-3	 Acer OEM

1.3.3 Connector Functions

Table 1-2 lists the different connectors on the system board and their respective functions.

Table 1-2 Connector Functions

Connector	Function
CN1	Suspend 5V
CN2	CPU thermal sensor connector
CN3	CPU fan connector
CN4	LAN Jack (RJ45) (optional)
CN5	Power connector
CN6	Floppy disk connector
CN7	USB connectors
CN8	COM1 (lower right), COM2 (lower left), and Parallel port (above)
CN9	Upper: PS/2 mouse connector Lower: PS/2 keyboard connector
CN10	Enhanced IDE 2 connector
CN11	Enhanced IDE 1 connector

Downloaded from www.Manualslib.com manuals search engine

H.Position (Horizontal Position)

- Press the ◀ to move the image left.
- Press the ▶ to move the image right.

V. Position (Vertical Position)

- Press the ◀ to move the image down.
- Press the ▶ to move the image up.

Frequency

"Frequency"changes the display data frequency to match the frequency of your computer's graphic card. If you experience a vertical flickering bar, use this function to make an adjustment.

Tracking

"Tracking" synchronizes the signal timing of the display with the graphic card. If you experience an unstable or flickering image, use this function to correct it.

Downloaded from www.Manualslib.com manuals search engine

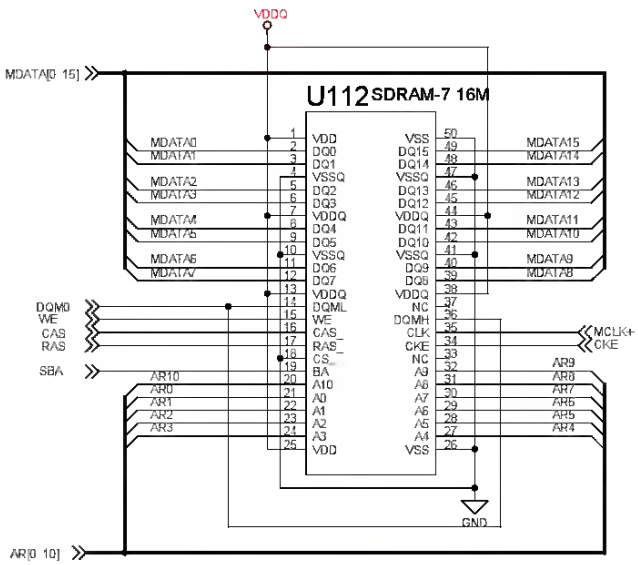

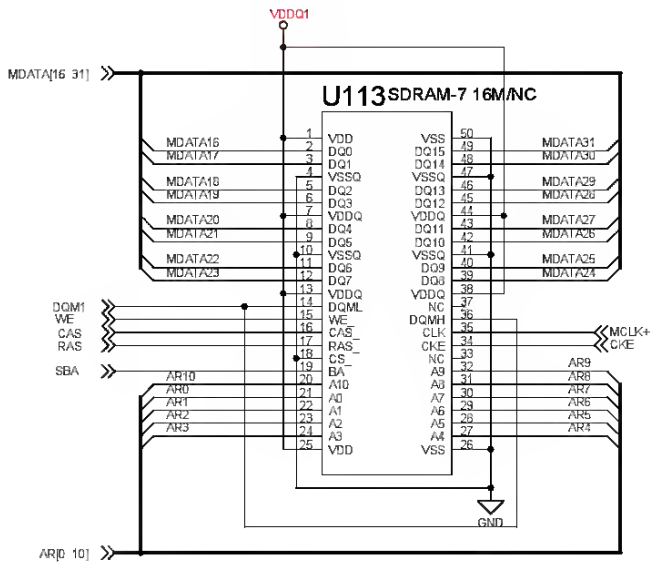

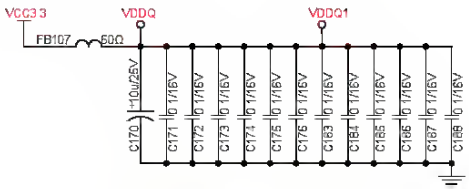

FB107
DC ON : 68mA @ Dot ON/OFF
DC OFF : 0mA

InnoLux LP2610		
Document Number : LP2610-DR4-02	**SIZE :** A4	**APPRO BY :**
TITLE : SDRAM		**CHECK BY :**
DATE : 2006-09-13		**DRAWN BY :**
SHEET 5 OF 6	**Rev :** V01	

Downloaded from www.Manualslib.com manuals search engine

Configuring 802.1x authentication (for corporate networks)

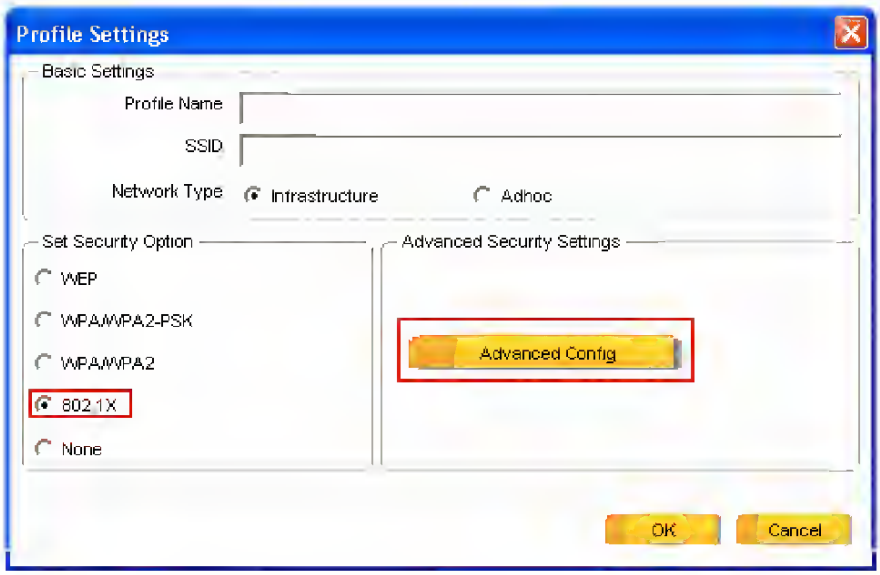

Select **802.1x** from the **Set Security Option** box.

Click on **Advanced Config** to enter your authentication settings.

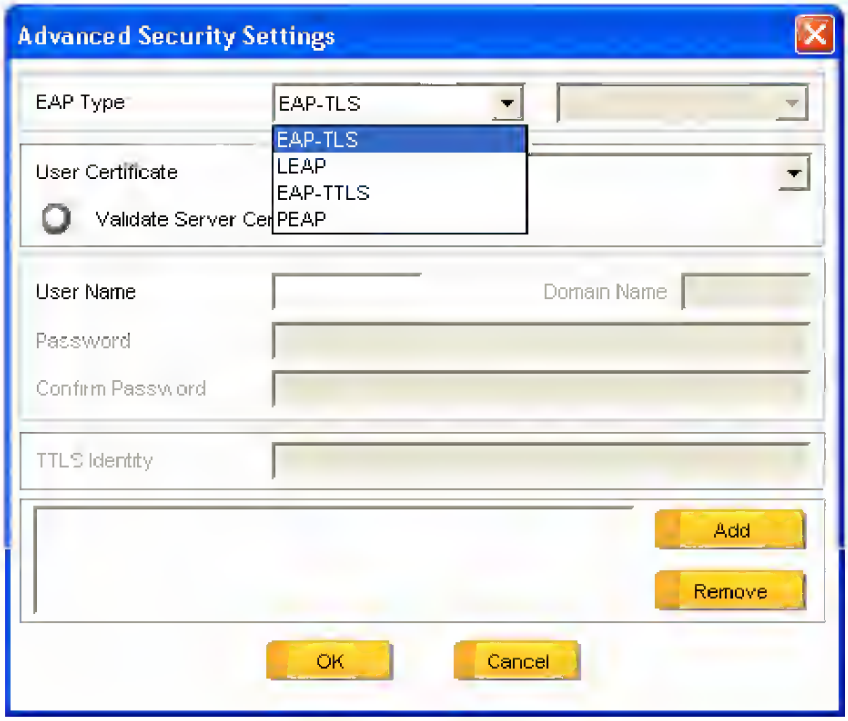

Downloaded from www.Manualslib.com manuals search engine

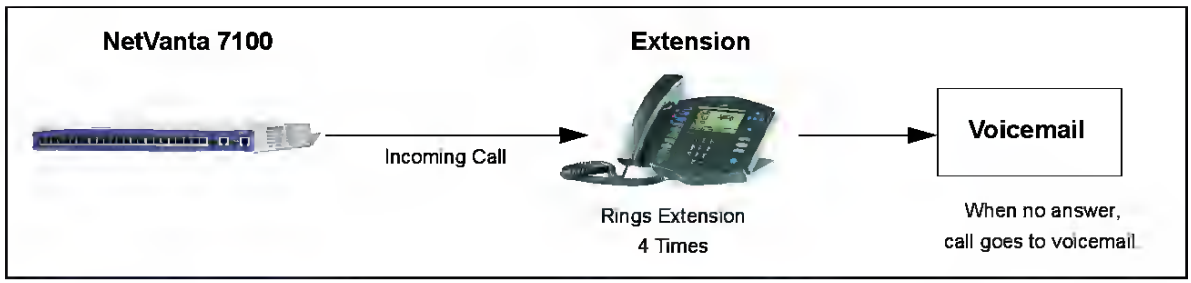

Figure 13. Call Coverage Example - Voicemail After Four Rings

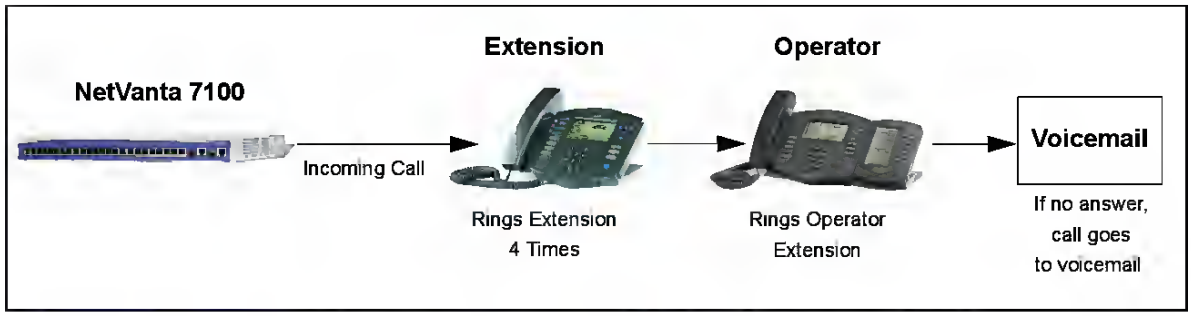

Figure 14. Call Coverage Example - Operator Coverage

Deleting a Phone User Account

Users accounts can be deleted quickly using the following procedure:

1. Navigate to the **Voice** > **Stations** > **User Accounts** menu shown in Figure 6 on page 20. Scroll to the bottom of the screen to the **Modify/Delete User** section.
2. Locate the user to remove; verify it is the correct user by **Last Name** and **Extension** fields. Select **Delete** to the right of the user listing.
3. Confirm the action when prompted by the system.

Copyright © 2007 ADTRAN, Inc

Downloaded from www.Manualslib.com manuals search engine

product where people will walk on the cord.

- If an extension cord is used with this product, make sure that the total ampere rating of the equipment plugged into the extension cord does not exceed the extension cord ampere rating. Also, make sure that the total rating of all products plugged into the wall outlet does not exceed the fuse rating.
- Do not overload a power outlet, strip or receptacle by plugging in too many devices. The overall system load must not exceed 80% of the branch circuit rating. If power strips are used, the load should not exceed 80% of the power strip's input rating.
- This product's AC adapter is equipped with a three-wire grounded plug. The plug only fits in a grounded power outlet. Make sure the power outlet is properly grounded before inserting the AC adapter plug. Do not insert the plug into a non-grounded power outlet. Contact your electrician for details.

Warning! The grounding pin is a safety feature. Using a power outlet that is not properly grounded may result in electric shock and/or injury.

Note: The grounding pin also provides good protection from unexpected noise produced by other nearby electrical devices that may interfere with the performance of this product.

- The system can be powered using a wide range of voltages: 100 to 120 or 220 to 240 V AC. The power cord included with the system meets the requirements for use in the country/region where the system was purchased. Power cords for use in other countries/regions must meet the requirements for that country/region. For more information on power cord requirements, contact an authorized reseller or service provider.

Product servicing

Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks. Refer all servicing to qualified service personnel.

Unplug this product from the wall outlet and refer servicing to qualified service personnel when:

- The power cord or plug is damaged, cut or frayed.

Downloaded from www.Manualslib.com manuals search engine

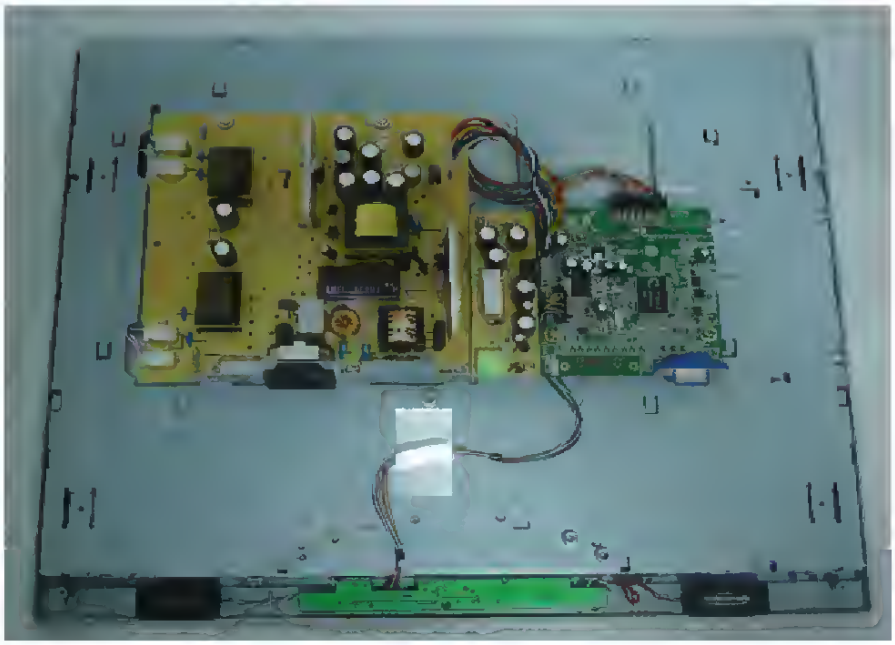

Fig (9)

Disassemble the main board (Fig 10-12)

1 Remove three screws mark in red to remove main board
2 Remove two screws mark in red to remove audio board
3 Remove five screws mark in red and remove AC-BKT with green to remove Power board
4 Remove connector wire with main, audio and power board

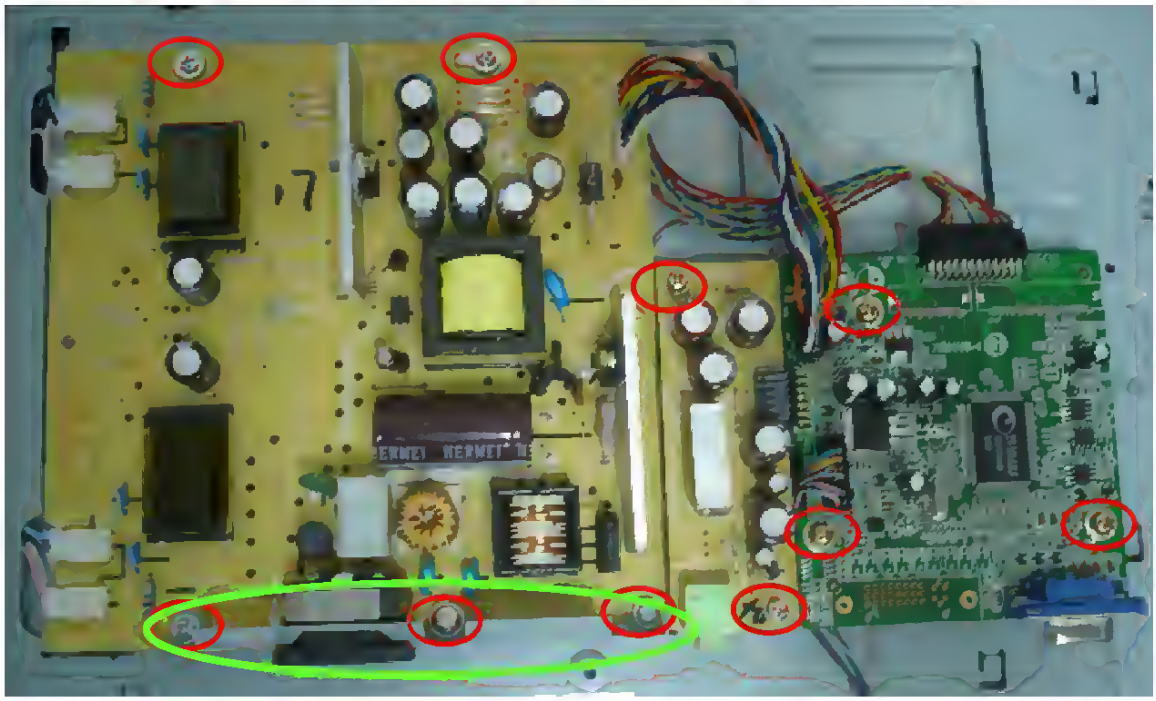

Fig(10)

Downloaded from www.Manualslib.com manuals search engine

Appendix

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:
Radiation Exposure Statement:
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. To maintain compliance with FCC RF exposure compliance requirements, please follow operation instruction as documented in this manual.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. SAR compliance has been established in typical laptop computer(s) with USB slot, and product could be used in typical laptop computer with USB slot. Other application like handheld PC or similar device has not been verified and may not compliance with related RF exposure rule and such use shall be prohibited.
The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination. The firmware setting is not accessible by the end user.

Downloaded from www.Manualslib.com manuals search engine

ORGANES ET COMMANDES

Panneau avant

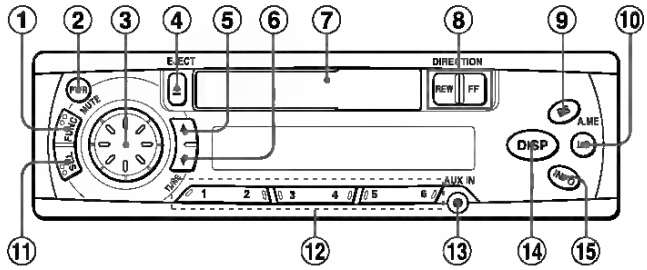

Fenêtre d'affichage

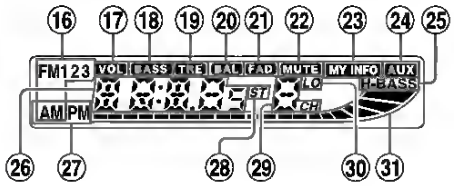

Panneau arrière



Panneau avant

① Touche FUNC (fonction)
② Touche PWR (mise sous/hors tension)/ MUTE
③ Bague Jog
④ Touche ⏏ (éjection)
⑤ Touche TUNE ▲
⑥ Touche TUNE ▼
⑦ Logement de cassette
⑧ Touche DIRECTION REW/FF
⑨ Touche A.ME (mémoire automatique)/PS (balayage de préréglage)
⑩ Touche LO (local)
⑪ Touche SEL (sélection)
⑫ Touches de stations préréglées (1 – 6)
⑬ Prise AUX IN (dia. 3,5 mm)
⑭ Touche DISP (affichage)
⑮ Touche INFO (mes informations)

Fenêtre d'affichage

⑯ Indicateur de bande
⑰ Indicateur VOL (volume)
⑱ Indicateur BASS (graves)
⑲ Indicateur TRE (aiguës)
⑳ Indicateur BAL (balance)
㉑ Indicateur FAD (fader)
㉒ Indicateur MUTE
㉓ Indicateur MY INFO (mes informations)
㉔ Indicateur AUX
㉕ Indicateur H-BASS (High BASS)
㉖ Section d'affichage principale
㉗ Indicateur AM/PM (horloge)
㉘ Indicateur ST (stéréo)
㉙ Section sous-affichage
㉚ Indicateur LO (local)
㉛ Indicateur d'activation/désactivation de tonalité bip

Panneau arrière

㉜ Prise d'antenne
㉝ Connecteur d'alimentation/enceintes
㉞ Fusible

Downloaded from www.Manualslib.com manuals search engine

Management

ECO Mode	Choose "On" to dim the projector lamp which will lower power consumption, extend the lamp life and reduce noise. Choose "Off" to return normal mode.
High Altitude	Choose "On" to turn on High Altitude mode. Operate the fans at full speed continuously to allow for proper high altitude cooling of the projector.
Auto Shutdown	The projector will automatically shutdown when there is no signal input after the allocated time. (default is 15 minutes)
Menu Display Time (Seconds)	Choose the OSD menu display time. (Default is 15 seconds). Select "Manual" to turn off main menu/one direct-key menu manually by user.
AC Power On	Choose "On" to power on projector while AC power plug in.
Lamp	Lamp Hour Elapse Displays the lamp's elapsed operating time (in hours).
	Lamp Reminding Activate this function to display a reminder to change the lamp 30 hours before its expected end-of-life.
	Lamp Hour Reset Choose "Yes" and press "ENTER"to turn the lamp hour counter to 0 hours.
Language	Choose the multilingual OSD menu. Use the ▲ ▼ key to select your preferred menu language. • Press "ENTER" to confirm the selection.

Note: Functions vary depending on model definition.

Downloaded from www.Manualslib.com manuals search engine

CONNECTING OPTIONAL EQUIPMENT → A

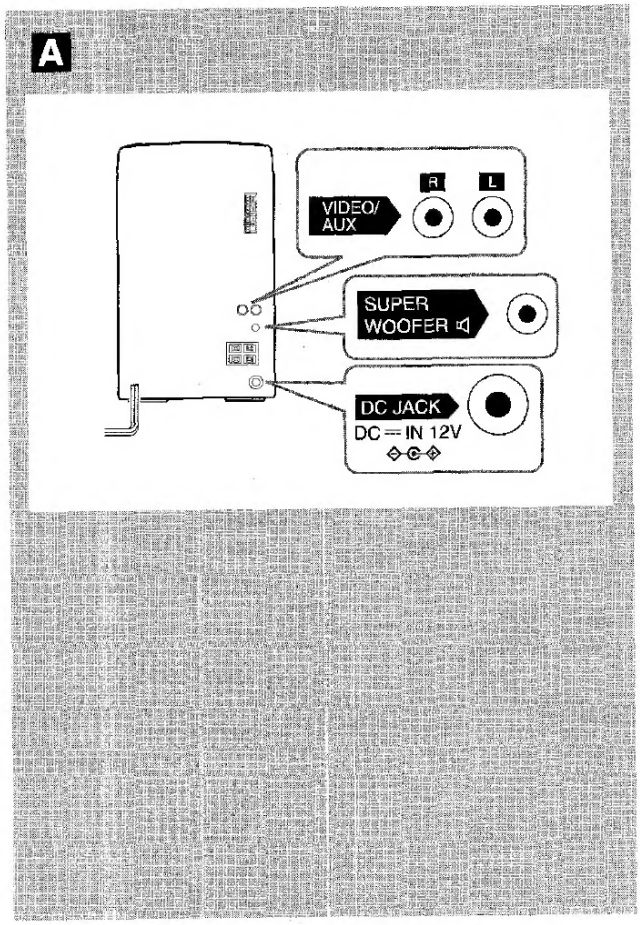

Refer to the operating instructions of the connected equipment for details.

- The connecting cords are not supplied. Obtain the necessary connecting cords.
- Consult your local Aiwa dealer for recommended equipment.

VIDEO/AUX JACKS

Sound signals can be input to this unit through the jacks. Use a cable with RCA phono plugs to connect audio equipment (turntables, LD players with analog output jacks, VCRs, etc.). Connect the red plug to the R jack, and the white plug to the L jack.

When connecting a turntable

Use an Aiwa turntable equipped with a built-in equallzer amplifier.

SUPER WOOFER JACK

Connect an optional powered sub woofer with a built-in-amplifier to the jack.

DC JACK (12 V)

Connect the Aiwa DCW-50 car battery cord to the jack. Then connect the other end to the cigarette lighter socket of the car.

- When the unit is used with the car battery cord, the clock does not operate.
- After switching from DC voltage to AC voltage, the current time must be set again.
- Use the Aiwa DCW-50 car battery cord only.
- When operating on car battery (DC 12 V), the POWER button on the remote control does not operate. Press the POWER button on the unit to turn the unit on. After the power is turned on, the remote control is operational.

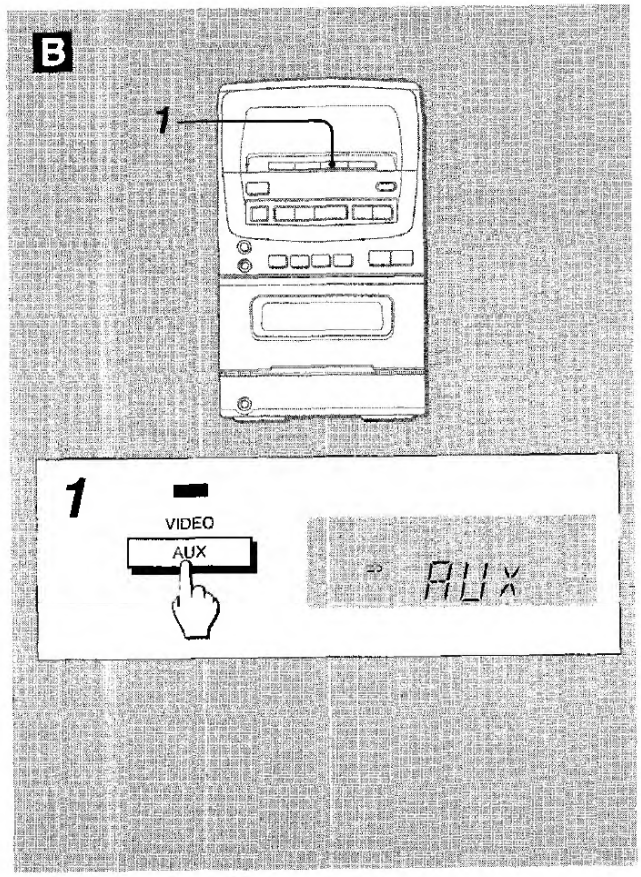

LISTENING TO EXTERNAL SOURCES → B

To play equipment connected to the VIDEO/AUX jacks, proceed as follows.

***1* Press the AUX/VIDEO button.**
"AUX" is displayed.

***2* Play the connected equipment.**

Downloaded from www.Manuatslib.com manuals search engine

Connecting the camera to your PC

① Turn on your computer, and then connect the USB cable to the USB port of your computer. Make sure the cable and the port are correctly aligned.

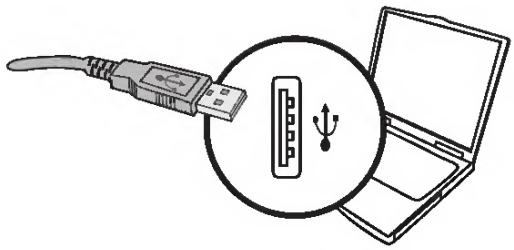

② Connect the other end of the USB cable to your camera.

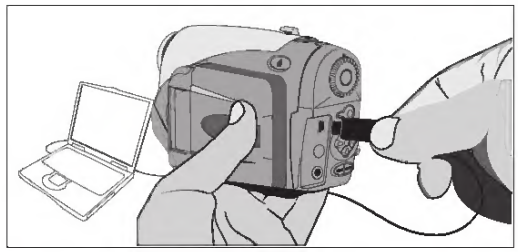

! **Notice for Windows 2000/XP/ME users:**
When you want to disconnect the camera from the computer, please follow these steps:
1. Double-click on the system tray.
2. Click (USB Disk), and then click Stop.
3. When the confirmation screen appears, select the camera and click OK.
4. Follow the on-screen instructions to safely disconnect the camera from your computer.

Downloaded from www.Manualslib.com manuals search engine

10 Index

A

analogue channel
- fine-tune 22

B

bracket 30

C

Channel list
- favourite 13
- troubleshooting 32

Channels
- favourite list 13
- install
  - automatic 21
  - manual 22
- rename 23
- reorder 23

Clock 16

computer format
- technical specifications 30

Connections
- HDMI
  - troubleshooting 33
- mains cord 24
- overview 24
- technical specifications 30
- troubleshooting 33

connectors
- overview 24

D

demo 20

devices
- add to home menu 10
- connect 24
- watch 9

display
- resolution 30

Dual view 17

E

EasyLink
- disable 29
- enable 29
- one-touch play 29
- one-touch standby 29

environmental care 5

F

factory settings 20

favourite list
- select 14
- set up 13

H

HDMI cable
- troubleshooting 33

I

install channels
- automatic 21
- manual 22

K

Kensington lock 29

L

location 19

lock
- Kensington 29
- TV lock/child lock 15

M

menu
- main menu 10
- teletext 13

Multimedia
- technical specifications 30

music
- USB 19

Downloaded From TV-Manual.com Manuals

Downloaded from www.Manualslib.com manuals search engine

7. The *.upg Help file is extracted.
8. Disconnect the USB flash drive from the PC.

- Do not switch off the TV or remove the USB flash drive during the update.
- If a power failure occurs during the update, do not remove the USB flash drive from the TV. The TV will continue the update as soon as power is restored.
- If an error occurs during the update, retry the procedure. If the error reoccurs, contact Philips Consumer Care.

1. Switch on the TV.
2. Connect the USB flash drive containing the *.upg Help file to the USB connector on the TV. Disconnect all other USB devices from the TV.
3. Press ⌂.
4. Select **[Setup]** > **[Software settings]** > **[Local updates]**.
The updates screen appears.
5. Select the '*.upg' Help file and press **OK**.

A message will display the update status. Follow the on-screen instructions to complete the update and restart your TV.

Reinstall the TV

Reinstalling your TV resets all picture and sound settings, and reinstalls all TV channels.

1. Press ⌂.
2. Select **[Setup]** > **[TV settings]** > **[Reinstall TV]**, then press **OK**.
3. Follow the on-screen instructions.